


Type	Hexagonal
Styles	External/External without undercut DIN 76
Material	Body: Polyamide 6.6
	Thread: Brass nickel plated
Colour	White
Standard Pack	From 100 pcs
Volume Resistance	10 ¹² Ohm/cm
Disruptive Strength	50 kV/mm
Length Tolerance	± 0.1 mm

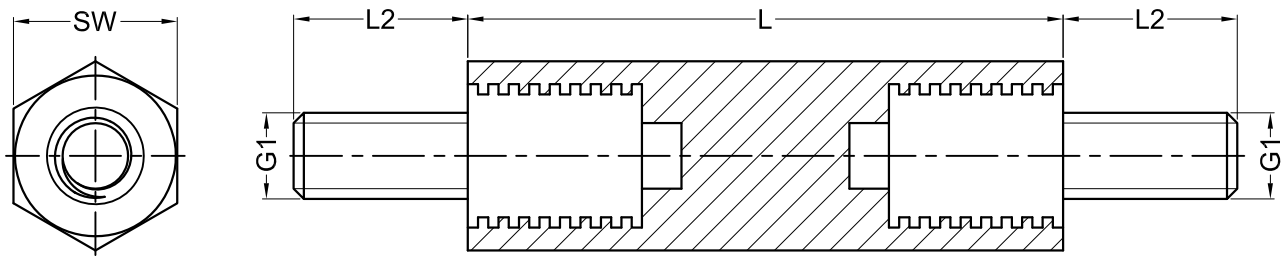

Part No.	SW (Hexagon)	G1 (Thread)	L2	Standard L Length In mm (Scale Length)	Torques (Nm)	Pull-Out Torques (N)
4182 x L (Length)	SW 6	M2.5	6	15 - 65	1.3	300
4183 x L	SW 6	M3	6	15 - 65	1.3	300
4186 x L	SW 8	M4	8	15 - 65	3.0	600
4188 x L	SW 10	M5	10	15 - 70	4.5	800

Order Example	Additional Information
4182 x L = 4182 x 15 mm	Torque and pull-out torques may vary in dependency of their intended purposes and environmental influences (e.g. temperature, humidity etc.) We recommend tests with materials in case of critical or unclear applications. Gecko International Co. assumes no liability for the mechanical strength values.

Gecko International Co.						DATE	2012-4-28
TITLE	HEX SPACER - MALE / MALE					SCALE	FIT
PART NAME	/	MOLD NO.	/	DRAW	JF	UNIT	MM
PART NO.	SEE TABLE	MATERIAL	SEE TABLE	DESIGN	JF	VERSION	A0
DWG NO.	E0025	COLOR	SEE TABLE	APPROVAL	FDL	VIEW	