

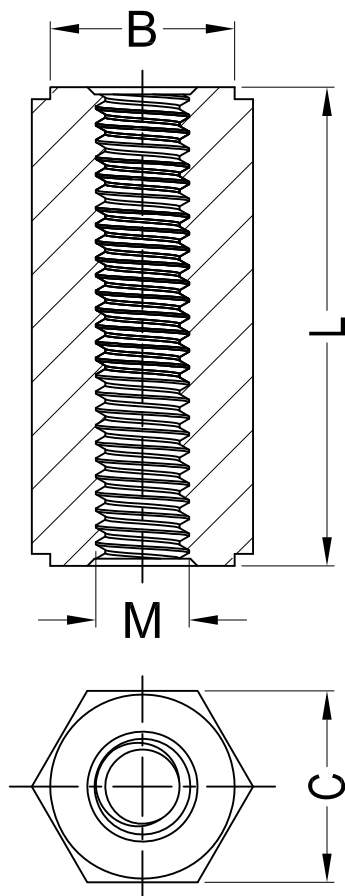


Fig.1

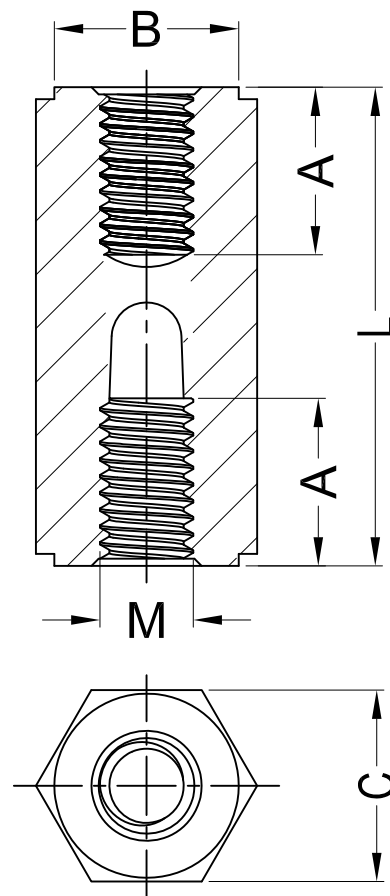


Fig.2

Notes:

1. Female Torques: $\geq 0.1 \text{ N}\cdot\text{m}$;

2. RoHS Compliant.

Part No.	Article No.	Material	Color	A	B	C	L	M	Fig.			
42928	GHTS-FF-M2.5-5-8B	PA6+GF UL94 HB	Black	/	4.85	5.0	8.0	M2.5	1			
40873	GHTS-FF-M2.5-5-10B						10.0					
43943	GHTS-FF-M2.5-5-11B						11.0					
40031	GHTS-FF-M2.5-5-12B						12.0					
42163	GHTS-FF-M2.5-5-14B						14.0					
42929	GHTS-FF-M2.5-5-15B						15.0					
42930	GHTS-FF-M2.5-5-18B						18.0					
40866	GHTS-FF-M2.5-5-20B						20.0					
42384	GHTS-FF-M2.5-5-20-66N	PA66 UL94 V2	Natural	10.0			25.0		2			
42165	GHTS-FF-M2.5-5-25B	PA6+GF UL94 HB	Black				28.0					
42166	GHTS-FF-M2.5-5-28B						30.0					
42164	GHTS-FF-M2.5-5-30B											

Gecko International Co.

DATE

2022-7-12

DIMENSION

TOLERANCE

TITLE

HEXAGONAL FEMALE/FEMALE SPACER

SCALE

FIT

$L \leq 4$

± 0.10

ARTICLE NO.

GHTS-FF-M2.5

MOLD NO.

/

DRAW

PLK

UNIT

MM

$4 < L \leq 15$

± 0.20

PART NO.

SEE TABLE

MATERIAL

SEE TABLE

DESIGN

PLK

VERSION

A0

$15 < L \leq 50$

± 0.30

DWG NO.

E4076


COLOR

SEE TABLE

APPROVAL

FDL

VIEW



$50 < L \leq 100$

± 0.40