



S/S
Fig.1

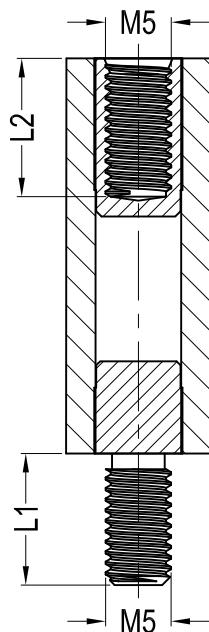

I/S
Fig.2

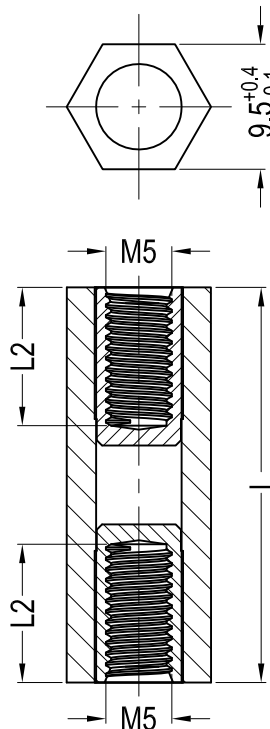

I/I
Fig.3

Notes:

- 1.Material: PA66 UL94 V2 +Brass;
- 2.Color:Natural;
- 3.RoHS Compliant;
- 4.Standard Specs
Withdraw Force:≥250.0N,
Holding Force: ≥250.0N,
Torque: ≥20.0kgf.cm

Part No.	Article No.	L1	L2	L	Fig.
40682	GNSP-HTS-M5-9.5-19-I2/S2	8.0	8.5	19.0	2
43479	GNSP-HTS-M5-9.5-19-S1/S1	10.0	/		1
43478	GNSP-HTS-M5-9.5-19-S2/S2	8.0			1
42336	GNSP-HTS-M5-9.5-19-I2/I2	/	8.5		3
40667	GNSP-HTS-M5-9.5-40-I1/S1	10.0	10.5	40.0	2
40669	GNSP-HTS-M5-9.5-40-S1/S1		/		1
40668	GNSP-HTS-M5-9.5-40-I1/I1	/	10.5	45.0	3
40670	GNSP-HTS-M5-9.5-45-I1/S1	10.0			/
40672	GNSP-HTS-M5-9.5-45-S1/S1		1		
40671	GNSP-HTS-M5-9.5-45-I1/I1	/	10.5	50.0	3
40673	GNSP-HTS-M5-9.5-50-I1/S1	10.0			/
40674	GNSP-HTS-M5-9.5-50-S1/S1		1		
40681	GNSP-HTS-M5-9.5-50-I1/I1	/	10.5		3

Part No.	Article No.	L1	L2	L	Fig.
42338	GNSP-HTS-M5-9.5-58-I1/S1	10.0	10.5	58.0	2
40675	GNSP-HTS-M5-9.5-58-I2/S2	8.0	8.5		2
41494	GNSP-HTS-M5-9.5-58-I3/S3	13.0	13.5		2
42337	GNSP-HTS-M5-9.5-58-S1/S1	10.0	/		1
42335	GNSP-HTS-M5-9.5-58-S2/S2	8.0			1
42339	GNSP-HTS-M5-9.5-58-I1/I1	/	10.5	70.0	3
40676	GNSP-HTS-M5-9.5-70-I1/S1	10.0			/
40677	GNSP-HTS-M5-9.5-70-S1/S1		1		
42340	GNSP-HTS-M5-9.5-70-I1/I1	/	10.5	84.0	3
42117	GNSP-HTS-M5-9.5-84-I1/S1	10.0			/
42341	GNSP-HTS-M5-9.5-84-S1/S1		1		
42342	GNSP-HTS-M5-9.5-84-I1/I1	/	10.5	88.2	3
42345	GNSP-HTS-M5-9.5-88.2-I1/S1	10.0			/
42346	GNSP-HTS-M5-9.5-88.2-S1/S1		1		
42347	GNSP-HTS-M5-9.5-88.2-I1/I1	/	10.5	90.0	3
41543	GNSP-HTS-M5-9.5-90-I1/S1	10.0			/
42343	GNSP-HTS-M5-9.5-90-S1/S1		1		
42344	GNSP-HTS-M5-9.5-90-I1/I1	/	10.5		3

Gecko International Co.

DATE

2021-6-29

DIMENSION

TOLERANCE

TITLE

METRIC HEX SPACER

SCALE

FIT

$L \leq 4$

± 0.10

ARTICLE NO.

GNSP-HTS-M5-9.5

MOLD NO.

S0381/51

DRAW

JF

UNIT

MM

$4 < L \leq 15$

± 0.20

PART NO.

SEE TABLE

MATERIAL

SEE NOTES

DESIGN

JF

VERSION

A0

$15 < L \leq 50$

± 0.30

DWG NO.

E4052


COLOR

SEE NOTES

APPROVAL

FDL

VIEW



$50 < L \leq 100$

± 0.40