
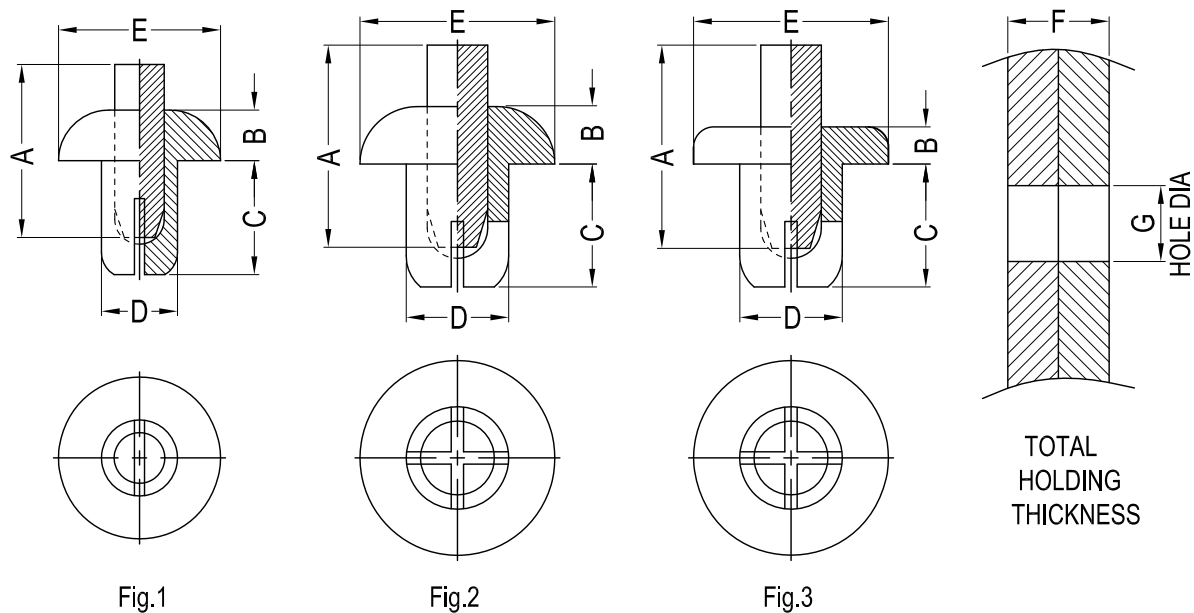




Notes:
RoHS Compliant.

Material:PA6 UL94 V2 Color:Black / White		Hole Dia. G	Extraction Force Kgf(Min.)	F	A	B	C	D	E	Fig.
Part No.	Article No.									
20318/20319	GRS3045B/W	3.1-3.2	7.0	2.0-3.0	8.9	2.0	4.5	3.0	5.8	1
20320/20321	GRS3055B/W			3.0-4.0			5.5			
20322/20323	GRS4050B/W	4.1-4.2	15.0	2.5-3.5	9.2	2.2	5.0	4.0	8.0	2
20324/20325	GRS4060B/W			3.5-4.5			6.0			
20326/20327	GRS4850B/W	4.8-4.9	1.2-3.0	11.0	3.2	5.0	4.8	9.9		
20328/20330	GRS5050B/W	5.1-5.2	20.0	2.0-3.0	9.6				2.8	
20332/20334	GRS5060B/W			3.0-4.0		6.0				
20335/20336	GRS5070B/W			4.0-5.0	11.4	7.0				
20337/20338	GRS5080B/W			5.0-6.0		8.0				
20339/20340	GRS5090B/W			6.0-7.0	12.4	9.0				
20341/20342	GRS5100B/W			7.0-8.0	13.6	10.0	9.5			
20343/20344	GRS6060B/W	6.1-6.2	30.0	2.5-4.0	9.8	1.5	6.0	6.0	11.0	3
20643/21123	GRS3053SPB/W	3.1-3.2	7.0	2.5-3.5	6.3	1.0	5.3	3.0	5.0	
Gecko International Co.					DATE	2021-11-5		DIMENSION		TOLERANCE
TITLE	PUSH RIVET BLUNT				SCALE	FIT		L≤4		±0.10
ARTICLE NO.	GRS	MOLD NO.	/	DRAW	JF	UNIT	MM		4 < L≤15	±0.20
PART NO.	SEE TABLE	MATERIAL	SEE TABLE	DESIGN	JF	VERSION	A0		15 < L≤50	±0.30
DWG NO.	/	COLOR	SEE TABLE	APPROVAL	FDL	VIEW			50 < L≤100	±0.40